

## TMP32-2



Motor pumps Powermate TMP series is the right answer to handle clean to semi-trash water in all sites. TMP series is conceived to work in tough conditions and guarantee performance despite muddy works sites. Pumps feature limited self-priming. Pump body filling with liquid is not mandatory requirement, although it will help to speed up the working time. Sturdy roll frame for added protection and easy maintenance.

### FEATURES

- Powermate OHV engine, 4-Cycle
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Practical quick user's Starting Instruction (decal)
- Pump type: Semi-trash
- Cast Iron Volute and Impeller for durability
- Roll cage for added protection



### Hauptmerkmale

Typ	Brauchwasserpumpe	
Max. Förderhöhe	m	7
Max. Förderlänge	m	29
Förderleistung	l/min	530
Eingangsschlauch Durchmesser	inches	2
Abgangsrohr Durchmesser	inches	2
max. Stoffgröße	mm	10



## Motor

Hersteller		Powermate
Typ		OHV
Nenn Drehzahl	rpm	3600
Kraftstoff		Benzin
Anlass System		Handstart
Ölmenge	l	0.6
Öl Wächter		√




## Autonomie

Tankinhalt	l	3.6
Kraftstoffverbrauch bei 75%	l/h	1.8
Laufzeit bei 75%	h	2.0



## Maßangaben

Länge	(L) mm	500
Breite	(W) mm	435
Höhe	(H) mm	420
Leergewicht	Kg	28
Abmessung Karton LxBxH	mm	530x440x445

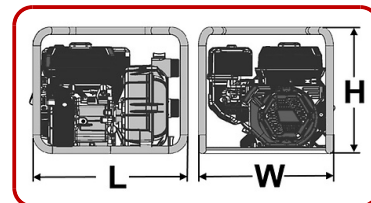

## Schallpegel

Garantierter Schallpegel (LWA)	dB(A)	108
SCHALLDRUCK in 7 m dB(A)	dB(A)	79

## Ausstattungen

Saugkorb	n°	1
Kupplungs Set	n°	2
Schlauchselle	n°	3
Zündkerzen Werkzeug		√
Öl Wächter		√



The information is aligned with the Data file at the time of download. Printed on 08/04/2019 (ID 6445)

©2019 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

**Powermate**  
by PRAMAC